

EA-410

State-of-the-art 42.7 cc engine makes the earth/ice auger a must for any digging operation.

- Designed for a wide variety of auger diameters
- Available auger lengths: 34" (881 mm) or 36" (925 mm)
- Heavy-duty handle and frame assembly reduces vibration for greater operator comfort



ICE CAPABLE

- Turns into a powerful ice auger for year-round use
- Drills through snow and ice quickly, cleanly
- 8" and 10" ice augers available




ECHO exclusive Pro-Fire® electronic ignition

30.2:1 gear ratio for fast cutting speeds

Throttle lock-out for added safety

Padded handle for additional operator comfort

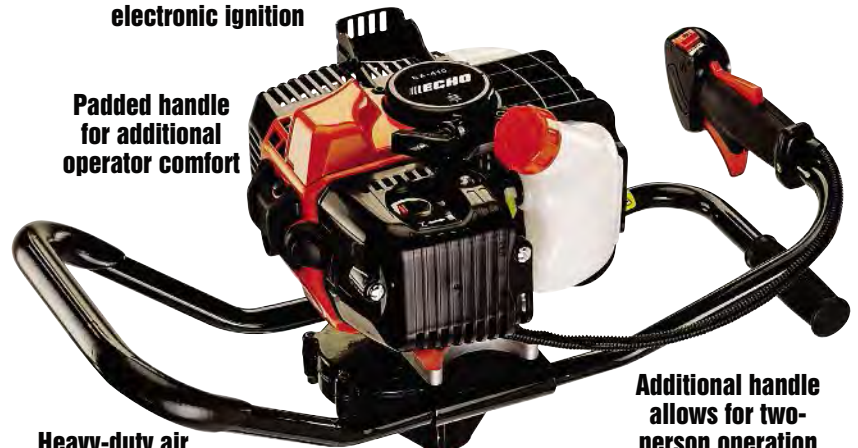

Heavy-duty air filtration system

Additional handle allows for two-person operation

EARTH/ICE AUGER

ECHO Quality Backed by an Extensive Warranty



The ECHO Earth/Ice Auger features a 5 year* consumer, 2 year commercial and 90 day rental warranty as well as a lifetime warranty on the ignition module.

*Visit www.echo-usa.com/5year to learn more.

EARTH/ICE AUGER ACCESSORIES

Part Number	Description
99944900150	2" Earth Auger w/Point (36" L)
99944900160	3" Earth Auger w/Point (36" L)
99944900170	4" Earth Auger w/Point (36" L)
99944900180	6" Earth Auger w/Point & Spring (34" L)
99944900190	8" Earth Auger w/Point & Spring (34" L)
99944900200	10" Earth Auger w/Point & Spring (34" L)
99944900335	Earth Auger Adapter w/Spring
99944900210	18" Extension Shaft - 7/8" dia.
99944900220	12" Extension Shaft - 7/8" dia.
99944900230	4" Replacement Blade - Earth Auger
99944900240	6" Replacement Blade - Earth Auger
99944900250	8" Replacement Blade - Earth Auger
99944900260	10" Replacement Blade - Earth Auger
99944900300	8" Replacement Blade - Ice Auger
99944900310	10" Replacement Blade - Ice Auger
99944900270	2" Replacement Point - Earth Auger
99944900370	1" Replacement Point - Earth Auger
99944900275	Replacement Point - Ice Auger
99944900280	8" Ice Auger Dual Blade
99944900290	10" Ice Auger Dual Blade


Shock-absorbing spring standard on 6", 8" and 10" augers



Auger diameter range - from 2" to 10" (sold separately)



Replacement point



EARTH/ICE AUGER SPECIFICATIONS

Model	Engine Displacement (cc)	Carburetor	Maximum Torque at Engine†	Maximum Torque at Auger†	Fuel Capacity (fl. oz.)	RPM‡	Dry Weight§ (lb)
EA-410	42.7	Diaphragm w/Purge Pump	1.62 ft/lb (2.2 Nm)	48.97 ft/lb (66.4 Nm)	33.8	10,500	21.6

† At maximum engine power. § Without auger.